



Class 1

Available in **Red** & **Black**

Compliant with ENA TS 12-24 and BS EN 61386-24 (compression strength equivalent to 450N at 75°C)

Supplied with inbuilt interference fit sockets tested to IP4X in accordance with BS EN 60529. Solid wall smooth internal & external surfaces, manufactured under ISO 9001:2015.

Standard Sizes (ID/OD):
100/110mm
150/160mm

Standard Lengths:
3m, 6m



Class 2

Available in **Red**, **Black** & **Green** (by request)

Compliant with ENA TS 12-24 and BS EN 61386-24 (compression strength equivalent to 450N at 50°C)

Supplied with inbuilt interference fit sockets tested to IP4X in accordance with BS EN 60529. Solid wall smooth internal & external surfaces, manufactured under ISO 9001:2015.

Standard Sizes (ID/OD):
34/38mm
90/96.5mm
100/110mm
150/160mm

Standard Lengths:
3m, 6m



Telecoms, Data & Fibre Optic

Available in **Green**, **Grey** & **Purple**

Performance designed in accordance with ENA TS 12-24 and BS EN 61386-24 class 2.

Supplied with inbuilt interference fit sockets tested to IP4X in accordance with BS EN 60529. Solid wall smooth internal & external surfaces, manufactured under ISO 9001:2015.

Standard Sizes (ID/OD):
49/54mm
90/96.5mm
100/110mm
150/160mm

Standard Lengths:
3m, 6m

Sub-Duct

Available in Black as standard. Other colours/wall thicknesses on request

Compliant with ENA TS 12-24 Class 3 and BS EN 61386-24. Solid-wall, smooth internal & external surfaces, manufactured under ISO 9001:2015.

Standard Sizes (ID):
32mm, 38mm, 50mm,
53mm, 93mm, 97mm
(Additional sizes available)

Standard Lengths:
6m
Up to 1500m
(coils or reels)

Bends & Accessories

A full range of bends and accessories available to order...

Bends

Standard angles:


11.25°, 22.5°, 45°, 90°

Standard radius:

r0.4m, r1.2m, r1.75m, r3.5m, r3.9m,

Non-Standard radius:

Special radius bends made to order

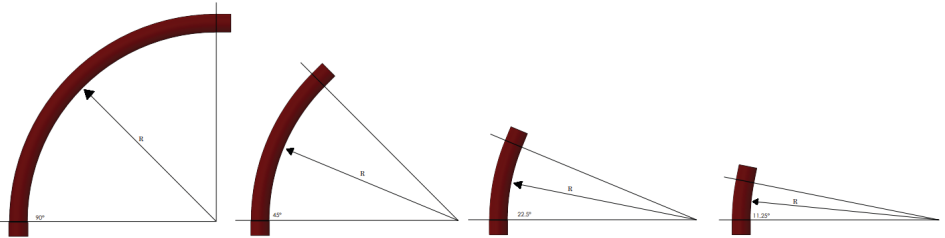

Couplers :

A full range of slip-couplings & socketed-couplings are available

Access Chambers

Opening:

300mm, 450mm, 600mm

Depth:

330mm

General purpose Duct

General purpose PVC Duct is a high-quality but lower-cost duct option where specific test standards are not required.

Naylor general purpose duct is manufactured to stringent quality controls but is not certified to national standards such as ENAT's. GP duct is manufactured with recycled content and colour is black.

Standard sizes (OD):
54mm
88.9mm
114mm
110mm
160mm

Standard lengths:
6m